



CONTRACTOR LINE


# MOBISCREEN MS 15 Z

TECHNICAL SPECIFICATION

■ TRACK-MOUNTED SCREENING PLANT



Side view MS 15 Z transport position

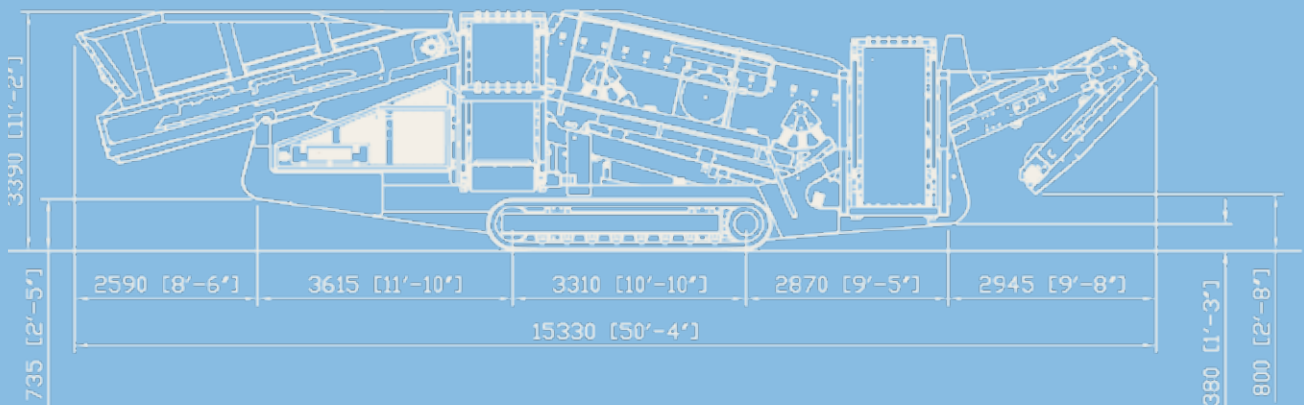

TECHNICAL SPECIFICATION MS 15 Z-AD

Feeding unit		Belt conveyor medium fractions	
Feed capacity up to approx. (t/h)	400	Width x length (mm)	900 x 7600
Feed size max. (mm)	250 x 250	Discharge height approx. (mm)	2500 - 3600
Feed height (mm)	3575	Belt conveyor oversize fractions	
Hopper capacity (m³)	8	Width x length (mm)	1400 x 5500
Belt conveyor feeder		Discharge height approx. (mm)	2800 - 3800
Width x length (mm)	1400 x 4500	Crawler chassis	
Discharge height approx. (mm)	-	Type	D3
Screening unit		Diesel-hydraulic drive	
Type	double-deck vibration screen	Engine power (kW)	93
Width x length (mm)	1520 x 4880	Transport	
Belt conveyor underflow material		Transport height approx. (mm)	3400
Width x length (mm)	1200 x 4500	Transport length approx. (mm)	15330
Discharge height approx. (mm)	-	Transport width approx. (mm)	2900
Belt conveyor fines fractions		Transport weight approx. (kg)	34000
Width x length (mm)	900 x 7600		
Discharge height approx. (mm)	3500 - 4000		