



CONTRACTOR LINE


MOBISCREEN MS 16 Z

TECHNICAL SPECIFICATIONS

■ TRACK-MOUNTED SCREENING PLANT



Side view MS 16 Z transport position

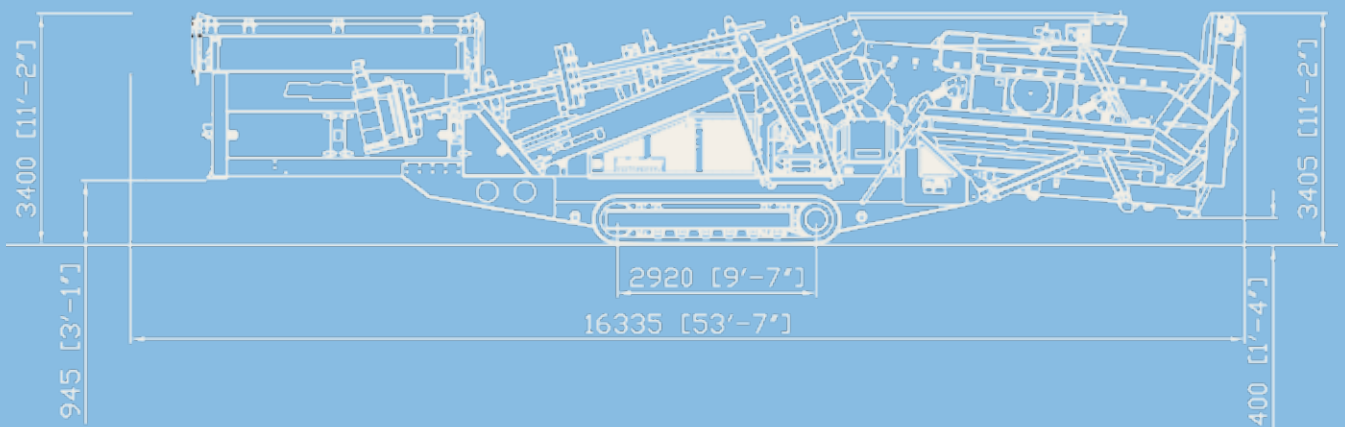

TECHNICAL SPECIFICATIONS MS 16 Z

Feeding unit		Belt conveyor medium fractions (lower deck)	
Feed capacity up to approx. (t/h)	350	Width x length (mm)	650 x 9100
Feed size max. (mm)	150 x 150	Discharge height approx. (mm)	4600
Feed height (mm)	3635	Belt conveyor oversize fractions (upper deck)	
Hopper capacity (m ³)	8	Width x length (mm)	650 x 9100
Belt conveyor feeder		Discharge height approx. (mm)	4600
Width x length (mm)	1200 x 3500	Crawler chassis	
Discharge height approx. (mm)	–	Type	D3
Feeding belt conveyor screen		Diesel-hydraulic drive	
Width x length (mm)	1050 x 9600	Engine power (kW)	75
Discharge height approx. (mm)	–	Transport	
Screening unit		Transport height approx. (mm)	3400
Type	double-deck vibration screen	Transport length approx. (mm)	15420
Width x length (mm)	1520 x 4270	Transport width approx. (mm)	3000
Belt conveyor fine fractions		Transport weight approx. (kg)	27000
Width x length (mm)	1200 x 6300		
Discharge height approx. (mm)	3900		