




QUARRY LINE


# MOBISCREEN MS 18 Z

TECHNICAL SPECIFICATIONS

■ TRACK-MOUNTED SCREENING PLANT

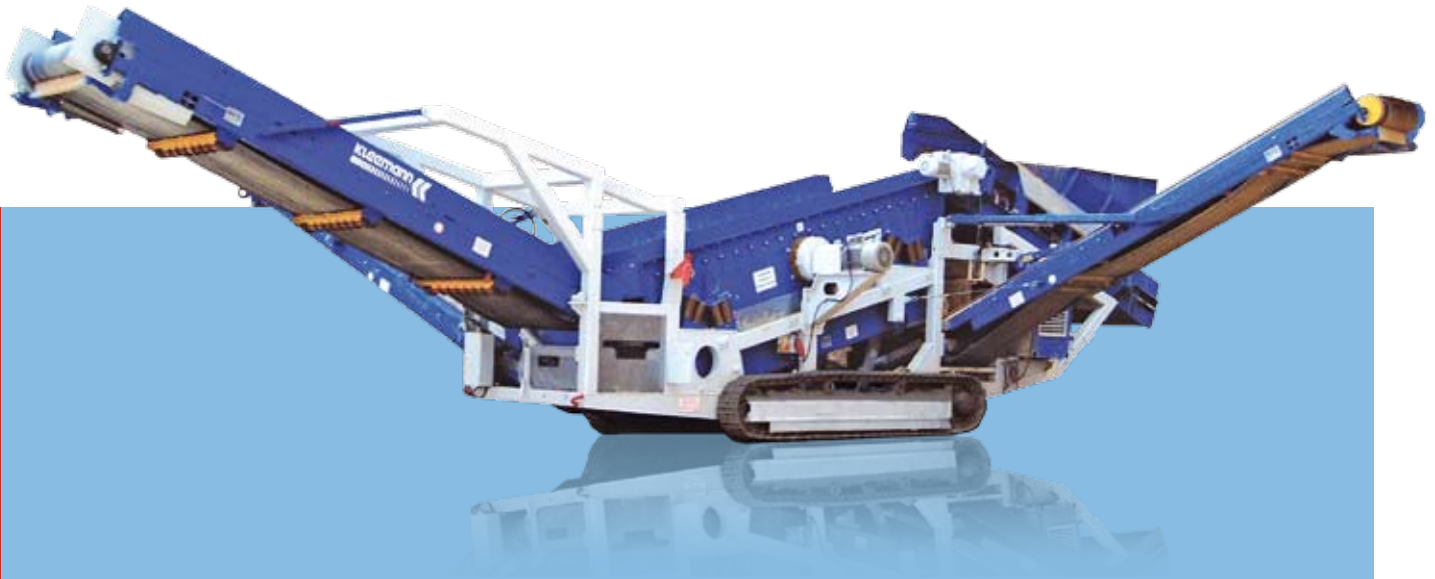

Side view MS 18 Z

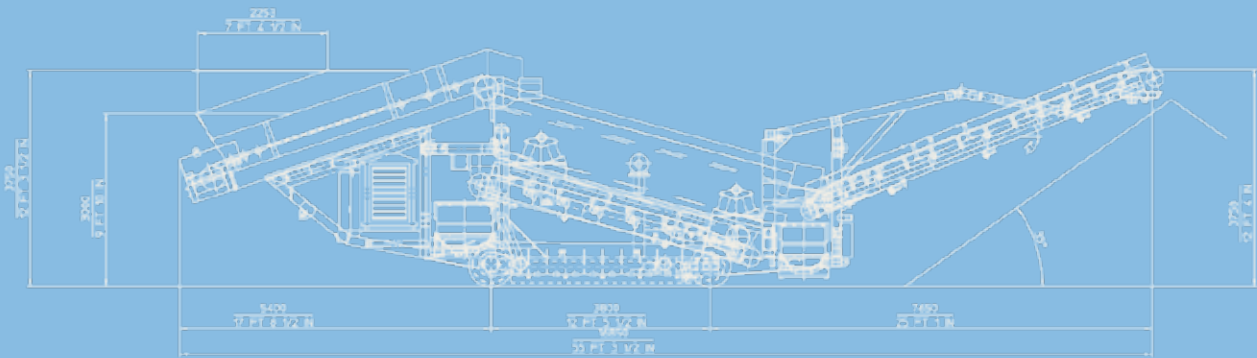

TECHNICAL SPECIFICATION MS 18 Z-AD

<b>Feeding unit</b>		<b>Belt conveyor medium fractions</b>	
Feed capacity up to approx. (t/h)	500	Width x length (mm)	650 x 9100
Feed size max. (mm)	500 x 500	Discharge height approx. (mm)	3300
Feed height (mm)	3750 (3000)	<b>Belt conveyor oversize fractions</b>	
Hopper capacity (m <sup>3</sup> )	6,5	Width x length (mm)	1400 x 6400
<b>Belt conveyor feeder</b>		Discharge height approx. (mm)	3750
Width x length (mm)	1400x5000	<b>Crawler chassis</b>	
Discharge height approx. (mm)	–	Type	D3
<b>Screening unit</b>		<b>Diesel-electric drive</b>	
Type	double-deck vibration screen	Engine power (kW)	98
Width x length (mm)	1800 x 5000	Generator (kVA)	85
<b>Belt conveyor underflow material</b>		<b>Transport (machine dismantled for transport)</b>	
Width x length (mm)	1400 x 4850	Transport height approx. (mm)	3450
Discharge height approx. (mm)	–	Transport length approx. (mm)	18200
<b>Belt conveyor fines fractions</b>		Transport width approx. (mm)	3080
Width x length (mm)	800 x 9100	Transport weight approx. (kg)	29000
Discharge height approx. (mm)	4100	Operating weight approx. (kg)	33000