



QUARRY LINE


# MOBISCREEN MS 20 D

TECHNICAL SPECIFICATIONS

■ TRACK-MOUNTED SCREENING PLANT



Side view MS 20 D

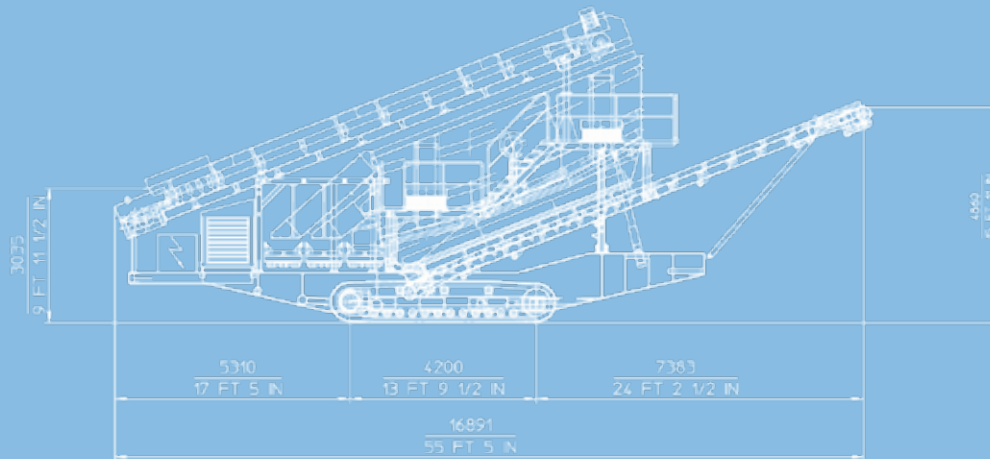

TECHNICAL SPECIFICATIONS MS 20 D

<b>Feeding unit</b>		<b>Belt conveyor screen overflow (middle deck)</b>	
Feed capacity up to approx. (t/h)	650	Width x length (mm)	650 x 7500
Feed size max. (mm)	150 x 150	Discharge height approx. (mm)	3200
Feed height (mm)	3035	<b>Belt conveyor oversize grain</b>	
Hopper capacity (m³)	–	Width x length (mm)	650 x 3000
<b>Belt conveyor feeder</b>		Discharge height approx. (mm)	–
Width x length (mm)	1400 x 11000	<b>Belt conveyor oversize grain</b>	
Discharge height approx. (mm)	–	Width x length (mm)	650 x 7500
<b>Screening unit</b>		Discharge height approx. (mm)	3040
Type	triple-deck vibration screen	<b>Crawler chassis</b>	
Width x length (mm)	2050 x 6000	Type	D6
<b>Belt conveyor screen underflow</b>		<b>Diesel-electric drive</b>	
Width x length (mm)	1200 x 11000	Engine power (kW)	225
Discharge height approx. (mm)	4860	Generator (kVA)	175
<b>Belt conveyor screen overflow (lower deck)</b>		<b>Weight</b>	
Width x length (mm)	650 x 7500	Operating weight approx. (kg)	540000
Discharge height approx. (mm)	3200	Machine dismantled for transport	